
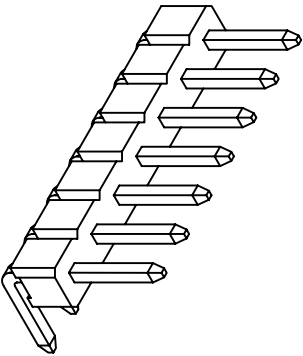


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.05.10	李春桥

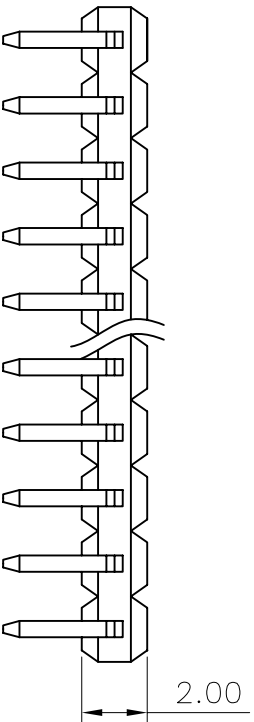

Specifications
Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0 Nylon 6T



All materials must be GP materials

**Recommended P.C.Board
Hole Layout**

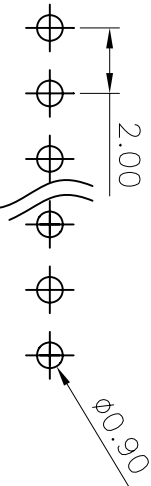

Ordering Information

MFR105 - XX XX A 01
No. of Pins per Row
01~40
Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
10=Gold 5u" /Tin
15=Gold 10u" /Tin
...

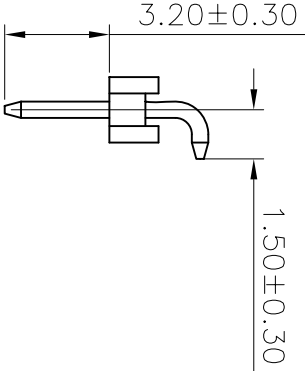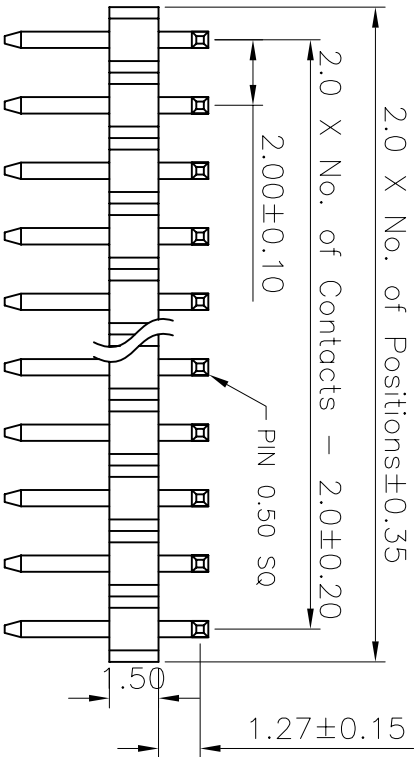

Shenzhen Sokcon Technology Co., Ltd
Shenzhen Sokcon Technology Co., Ltd

GENERAL TOLERANCE

X. ± 5.0"	X. ± 0.30
.X" ± 3.0"	.X ± 0.25
.XX ± 2.0"	.XX ± 0.15
.XXX ± 1.0"	.XXX ± 0.10

DESIGN: 李春桥

DATE: 2013.05.10

DWG. NO.

MFR105-A01

TITLE.

2.00 PIN HEADER
DUAL ROWS R/A TYPE
BASE 1.50H

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



A

B

C

D

E

F

A

B

C

D

E

F