

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.10	张荣




Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T(Processing temp.260°C,10sec)
All materials must be GP materials

Recommended P.C.Board
Hole Layout

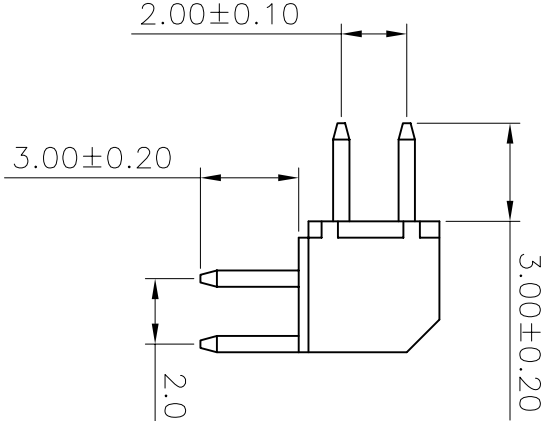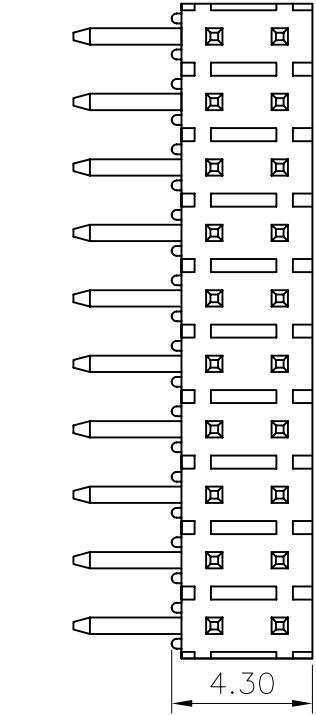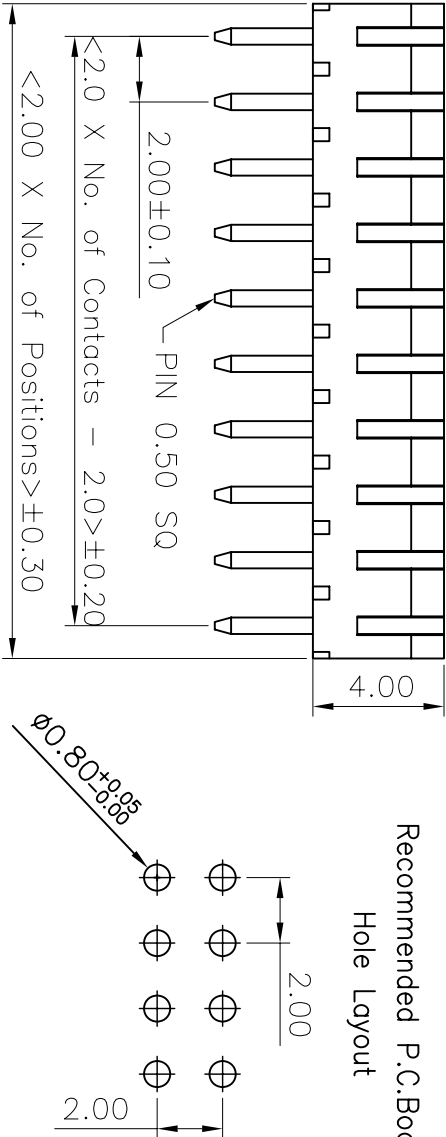

Ordering Information

MFR201 - XX XX A 01 - X
No. of Pins per Row Contact Plating
03~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
Options
P=cap
T=tape reel
PT=cap+tape reel

 深圳市硕康达科技有限公司 Shenzhen Shi Sokcom Technology Co., Ltd										GENERAL TOLERANCE				DESIGN: 张 荣		DATE: 2007.09.10		DWG. NO. MFR201-A01		TITLE. 2.00 PIN HEADER DUAL ROWS R/A TYPE BASE 4.30H	
X. ± 5.0°										K. ± 0.30		CHECKED:		DATE:							
X. ± 3.0°										X. ± 0.25		AUDITED:		DATE:							
XX ± 2.0°										XX ± 0.15		APPROVED:		DATE:							
.XXX ± 1.0°										.XXX ± 0.10				PART NO. MFR201-XX XX A01-X							
REV. 01		UNIT. mm		SCALE. 5:1		PAGE. 1/1															