

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.10	张荣


2.0 X No. of Positions ± 0.35

2.0XNo.of Contacts -2.0 ± 0.20

2.00 ± 0.13

PIN 0.50 SQ

2.00

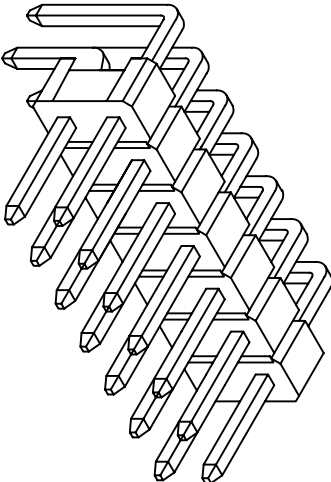

Specifications

Current Rating: 2Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to $+105^{\circ}\text{C}$


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT
All materials must be ROHS materials

Recommended P.C.Board

Hole Layout



(Tolerance: ± 0.05)



Ordering Information

MFR203 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

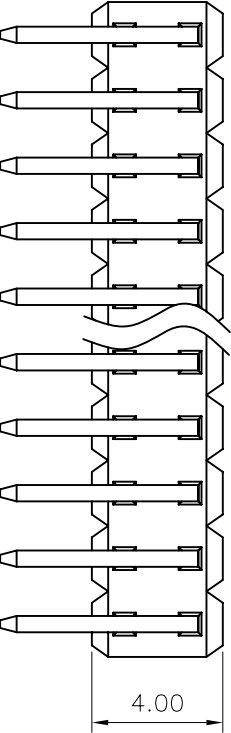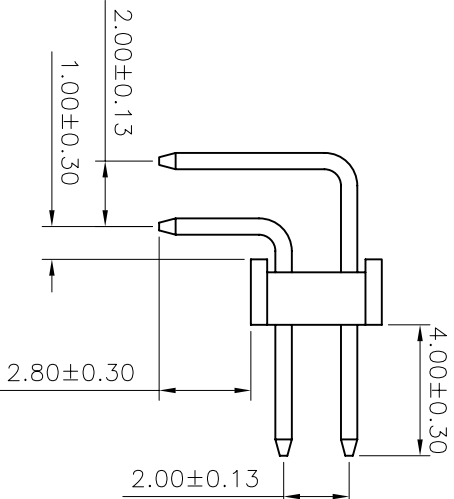

深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹晖

DATE: 2012.09.03

DWG. NO.

MFR203-A01

TITLE. 2.00 PIN HEADER

REV.

01

UNIT.

mm

SCALE.

1:1

PAGE.

1/1



X $\pm 5.0^{\circ}$ X ± 0.30

X $\pm 3.0^{\circ}$ X ± 0.25

X $\pm 2.0^{\circ}$ XX ± 0.15

.XXX $\pm 1.0^{\circ}$.XXX ± 0.10

CHECKED:

AUDITED:

APPROVED:

DATE:

DATE:

DATE:

PART NO.

MFR203-XX XX A01

DUAL ROWS R/A TYPE

BASE 2.00H