

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张荣




Specifications

Current Rating: 3Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT
All materials must be GP materials

Recommended P.C.Board
Hole Layout
(Tolerance: ± 0.05)

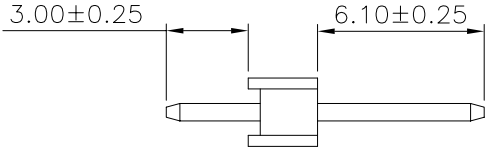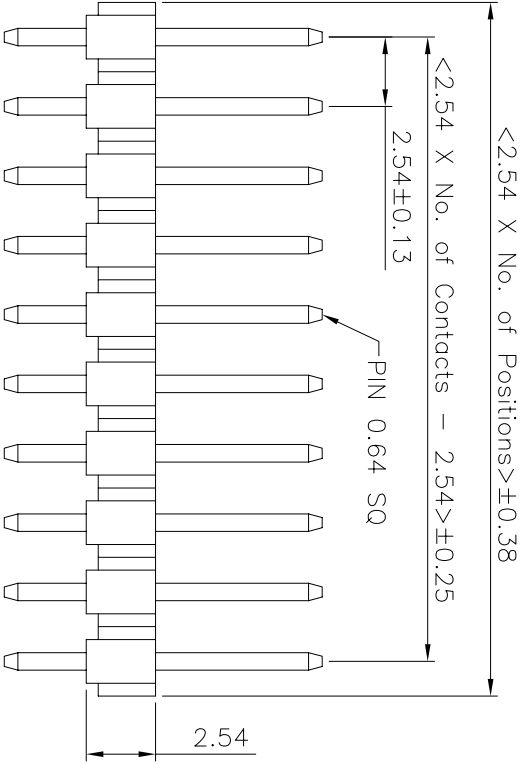

Ordering Information

MHD101 - XX XX A 01 - 1

No. of Pins per Row Contact Plating
01= Tin
02= Gold Flash
Duplex plating
05= Gold Flash / Tin
...

深圳市硕康达科技有限公司 ShenZhenShi Sokconn Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 张荣	DATE: 2007.09.15	DWG. NO.	TITLE. 2.54 PIN HEADER SINGLE ROW DIP TYPE BASE 2.54H
X.° ± 5.0°		X. ± 0.30		CHECKED:	DATE:	MHD101-A01-1			
.X° ± 3.0°		.X ± 0.25		AUDITED:	DATE:	PART NO.			
.XX° ± 2.0°		.XX ± 0.15		APPROVED:	DATE:	MHD101-XX XX A01-1			
.XXX° ± 1.0°		.XXX ± 0.10							
REV.	01	UNIT.	mm	SCALE.	5:1	PAGE.	1/1		