


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.06.20	李春桥

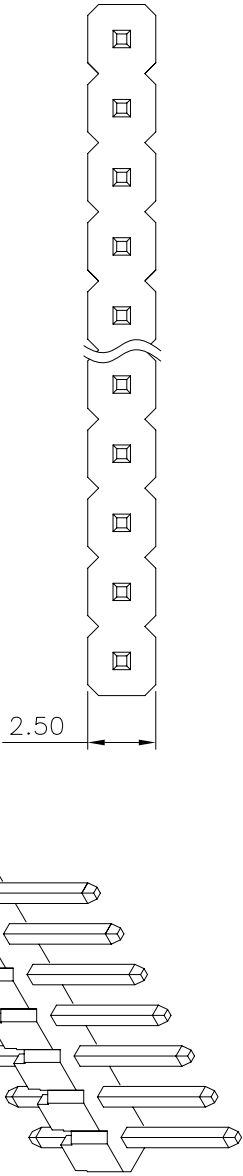

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass


Insulation Material: Polyester, UL 94V-0

PBT

All materials must be GP materials

Recommended P.C.Board

Hole Layout
(Tolerance:±0.05)




Ordering Infomation

MHD101 - XX XX A 01

No. of Pins per Row Contact Plating
01~40 01=Tin
02=Gold Flash

Duplex plating
05=Gold Flash /Tin
...

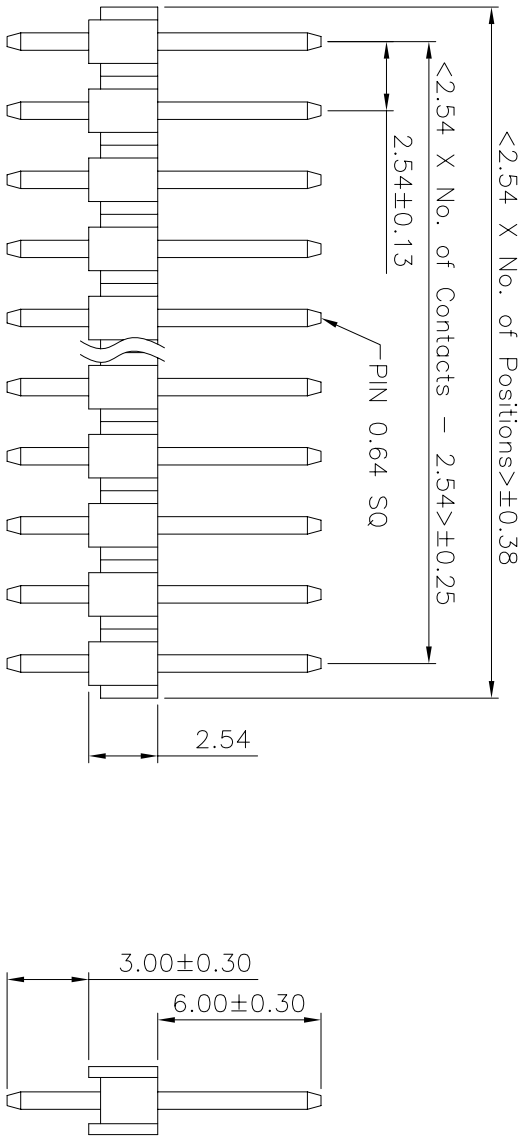

深圳市硕康达科技有限公司
ShenzhenShi Sokoon Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2013.06.20

DWG. NO.

MHD101-A01

TITLE.

2.54 PIN HEADER

X.° ± 5.0° X. ± 0.30

CHECKED:

DATE:

PART NO.

MHD101-XX XX A01-X

SINGLE ROW DIP TYPE

.XX° ± 2.0° .XX ± 0.15

AUDITED:

DATE:

DATE:

BASE 2.54H

.XXX° ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

DATE:

DATE:

DATE: