

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.22	张 荣

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials





Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
PBT

All materials must be GP materials

Recommended P.C.Board

Hole Layout

(Tolerance:±0.05)

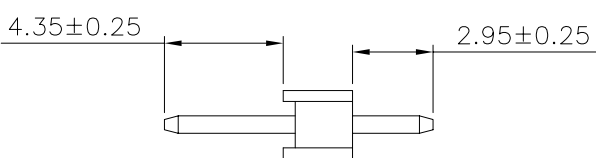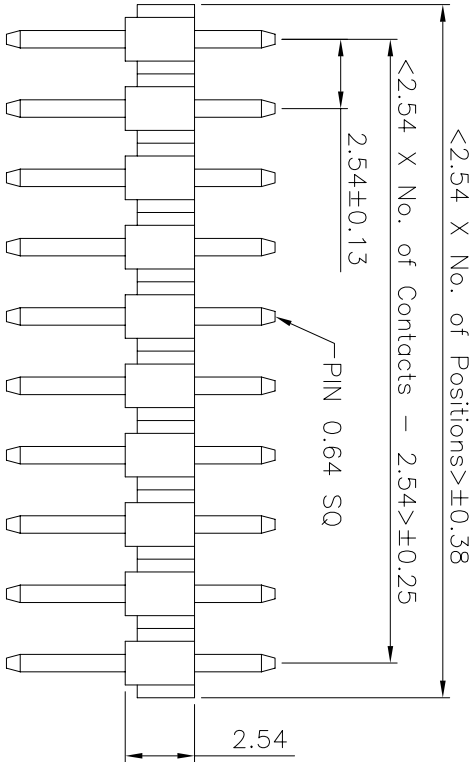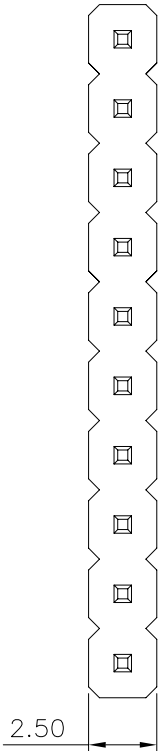


Ordering Information

MHD101 - XX XX A 02 - X

No. of Pins per Row Contact Plating
01~40 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

Options
P=cap
T=tape reel
C=acetate tape
PT=cap+tape reel



GENERAL TOLERANCE				DESIGN: 张 荣		DATE: 2007.11.22		DWG. NO. MHD101-A02		TITLE: 2.54 PIN HEADER SINGLE ROW DIP TYPE BASE 2.54H	
X.° ± 5.0°	X.	± 0.30	CHECKED:	DATE:							
.X° ± 3.0°	.X	± 0.25	AUDITED:	DATE:							
.XX° ± 2.0°	.XX	± 0.15	APPROVED:	DATE:							
.XXX° ± 1.0°	.XXX	± 0.10									

REV.	UNIT.	SCALE.	PAGE.	
01	mm	5:1	1/1	