


REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张荣





Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT

All materials must be GP materials

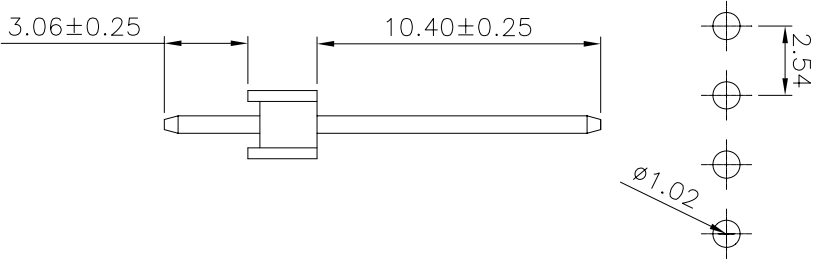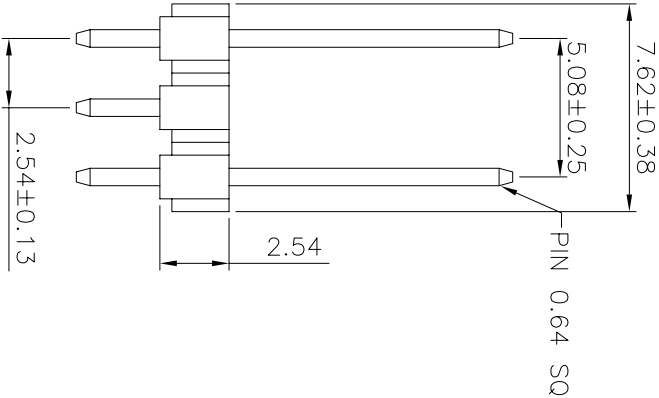

Ordering Information

MHD101 – XX XX A 03

No. of Pins per Row Contact Plating

01~40 01=Tin

 02=Gold Flash

 Duplex plating

 05=Gold Flash /Tin

 ...

 深圳市硕康达科技有限公司 ShenZhenShi Sokconn Technology Co., Ltd					GENERAL TOLERANCE		DESIGN: 张 荣	DATE: 2007.09.15	DWG. NO.	TITLE: 2.54 PIN HEADER SINGLE ROW DIP TYPE BASE 2.54H
					X: ± 5.0°	X. ± 0.30	CHECKED:		MHD101-A03	
					X° ± 3.0°	X ± 0.25				
					.XX ± 2.0°	.XX ± 0.15	AUDITED:			
REV.	UNIT.	SCALE.	PAGE.				APPROVED:	DATE:	PART NO.	
01	mm	5:1	1/1						MHD101-XX XX A03	