

REV.	LOOAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.08.01	李春桥

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
PBT

All materials must be ROHS materials

Recommended P.C.Board





Hole Layout
(Tolerance:±0.05)



Ordering Information

MHD101 - XX XX A 72

No. of Pins per Row Contact Plating
01=Ti
02=Gold Flash
Duplex plating
05=Gold Flash /Ti
...

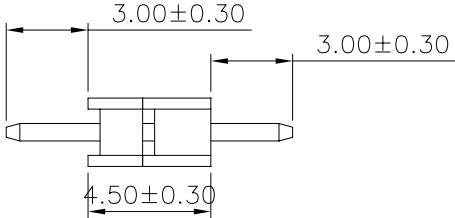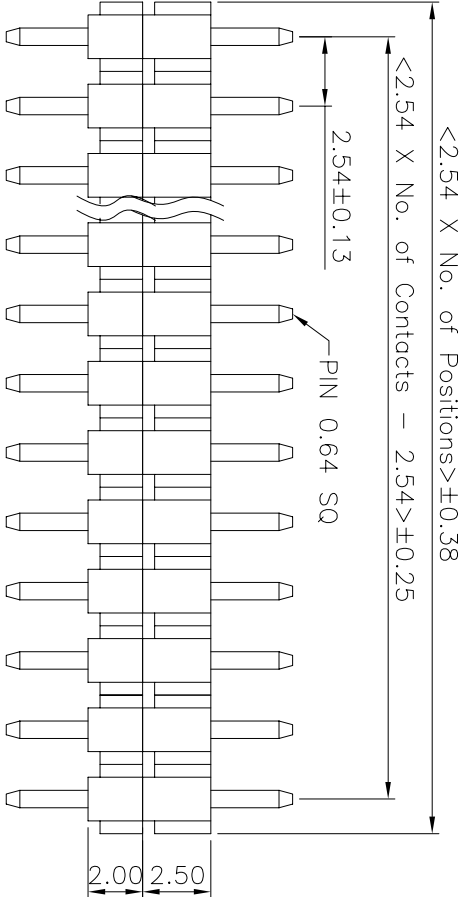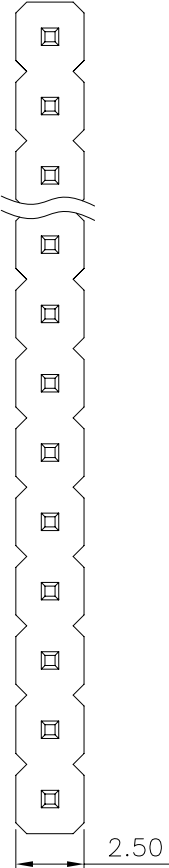

深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2013.08.01

DWG. NO.

MHD101-A72

TITLE.

2.54 PIN HEADER
SINGLE ROW DIP TYPE
BASE 4.50H

X.° ± 5.0° X. ± 0.30

CHECKED:

DATE:

PART NO.

.XX° ± 3.0° X. ± 0.25

AUDITED:

DATE:

MHD101-XX XX A72

.XX° ± 2.0° .XX ± 0.15

APPROVED:

DATE:

.XXX° ± 1.0° .XXX ± 0.10