



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.11.22	张 荣

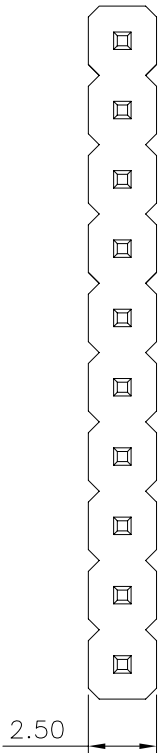

Recommended P.C.Board
Hole Layout
(Tolerance: +/- 0.05)




Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials
Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT
All materials must be GP materials

Ordering Information

MHD102 - XX XX A 01

No. of Pins per Row Contact Plating
01~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

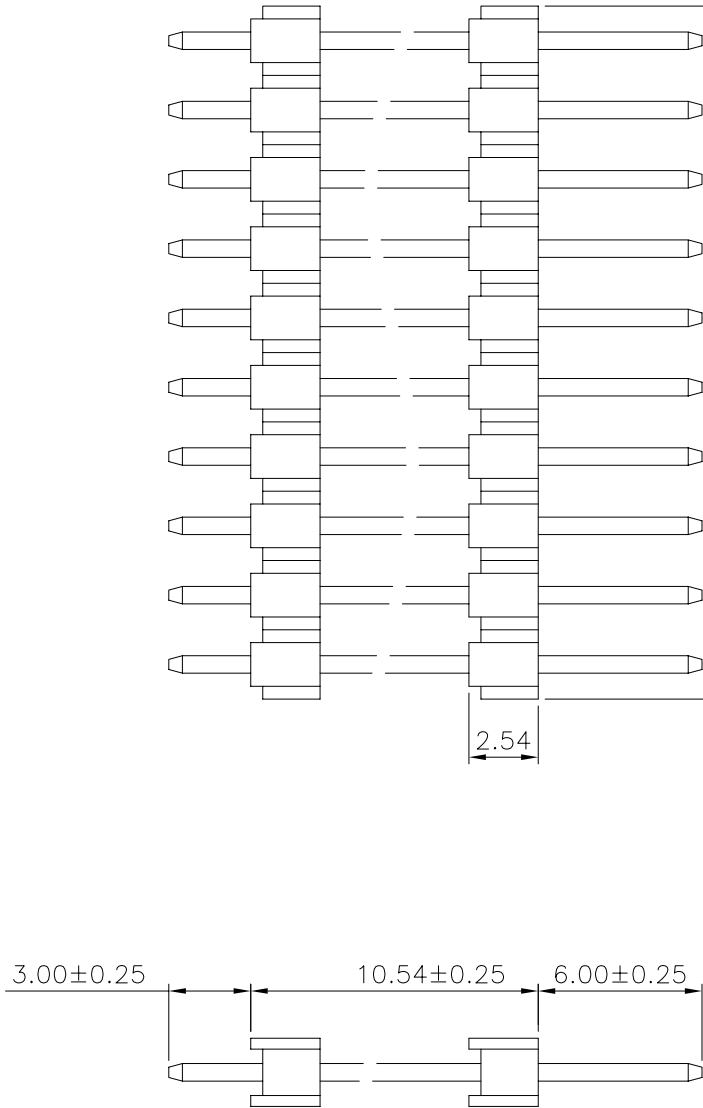

深圳市硕康达科技有限公司
ShenZhenShi Sokcoonn Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

GENERAL TOLERANCE		DESIGN:	张 荣	DATE:	2007.11.22	DWG. NO.	MHD102-A01	TITLE:	2.54 PIN HEADER SINGLE ROW DIP TYPE BASE 2.54H
X° ± 5.0°	X. ± 0.30	CHECKED:		DATE:		PART NO.			
.X° ± 3.0°	.X ± 0.25	AUDITED:		DATE:					
.XX° ± 2.0°	.XX ± 0.15	APPROVED:		DATE:					
.XXX ± 1.0°	.XXX ± 0.10								