

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.08.23	尹 晖

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T

All materials must be GP materials

Recommended P.C.Board

Hole Layout
(Tolerance:±0.05)






Ordering Information

MHD105 - XX XX A 01

No. of Pins per Row Contact Plating
01~40 01=Tin

02=Gold Flash
Duplex plating
05=Gold Flash /Tin
11=Gold 1u"/Gold 10u"

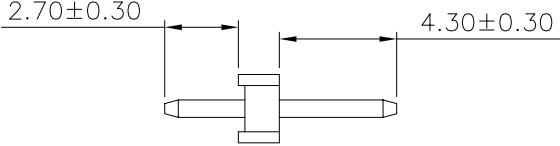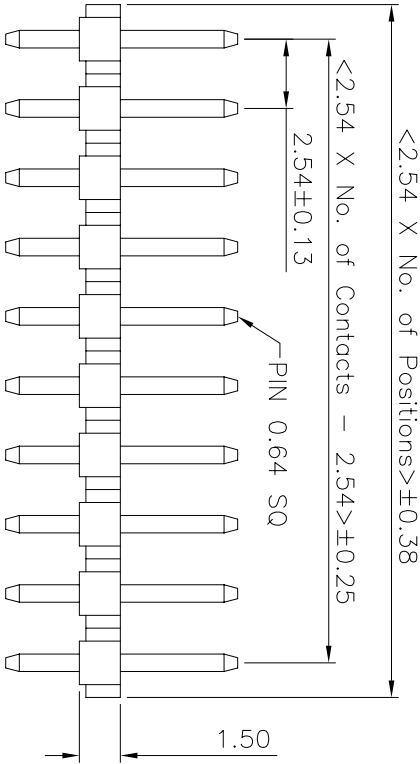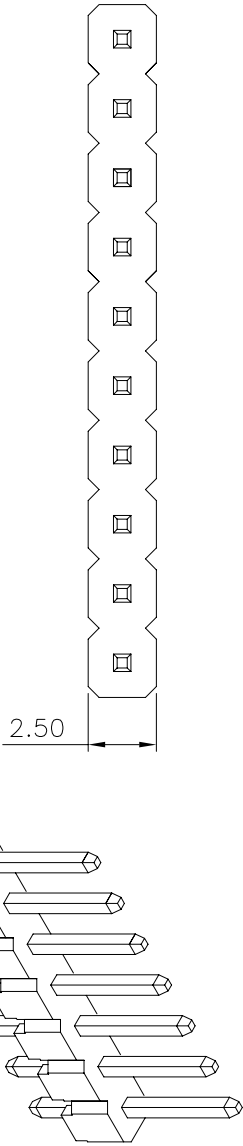

深圳市硕康达科技有限公司
ShenzhenShi Sokcom Technology Co.,Ltd

GENERAL TOLERANCE

Sokcom — Shenzhen Sokcom Technology Co., Ltd. — 深圳市硕康达科技有限公司 ShenzhenShi Sokcom Technology Co., Ltd				REV. 01		UNIT. mm	SCALE. 1:1	PAGE. 1/1		
X.° ± 5.0°		X. ± 0.30		CHECKED:	DATE:	MHD105-A01				
.X° ± 3.0°		.X ± 0.25		AUDITED:	DATE:	PART NO.				
.XX° ± 2.0°		.XX ± 0.15		APPROVED:	DATE:	MHD105-XX XX A01				
.XXX° ± 1.0°		.XXX ± 0.10								
2.54 PIN HEADER										
SINGLE ROW DIP TYPE										
BASE 1.50H										