
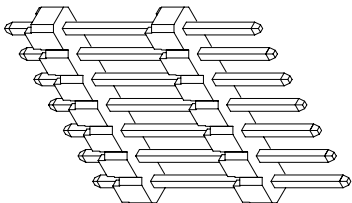


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.11.28	尹 晖

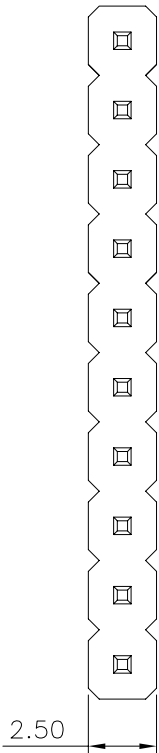

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T

All materials must be GP materials

Recommended P.C.Board

Hole Layout
(Tolerance:±0.05)





Ordering Information

MHD125 - XX XX A 01

No. of Pins per Row Contact Plating
01=Tin
02=Gold Flash

Duplex plating
05=Gold Flash /Tin
12=Gold 10u

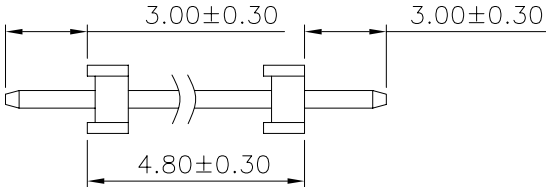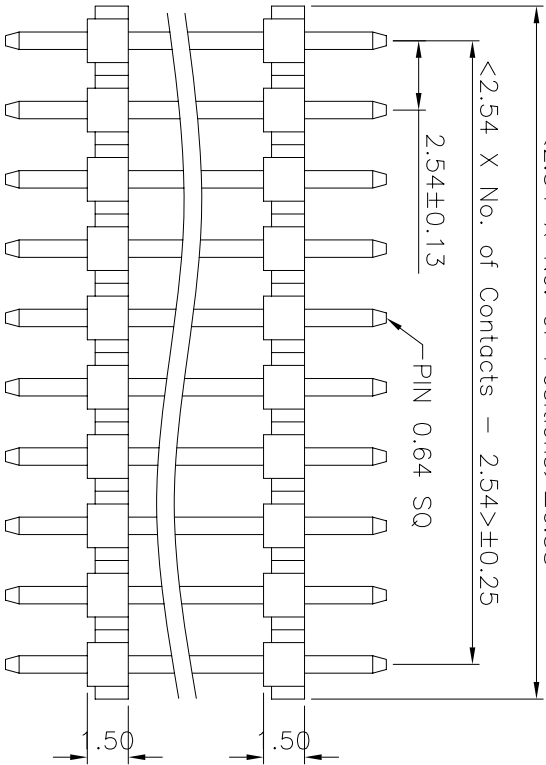

深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2012.11.28

DWG. NO.

MHD125-A01

TITLE:

2.54 PIN HEADER

X. ± 5.0°

CHECKED:

DATE:

PART NO.

SINGLE ROW DIP TYPE

.XX ± 3.0°

AUDITED:

DATE:

MHD125-XX XX A01

BASE 1.50H

.XXX ± 1.0°

APPROVED:

DATE:

REV.

01

UNIT.

mm

SCALE.

5:1

PAGE.

1/1



A

B

C

D

E

F

A

B

C

D

E

F