



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张 荣



Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
PBT

All materials must be ROHS materials

Recommended P.C.Board

Hole Layout
(Tolerance:±0.05)





Ordering Information

MHD201 - XX XX A 01

No. of Pins per Row Contact Plating
01~40
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

Duplex plating
05=Gold Flash /Tin
...

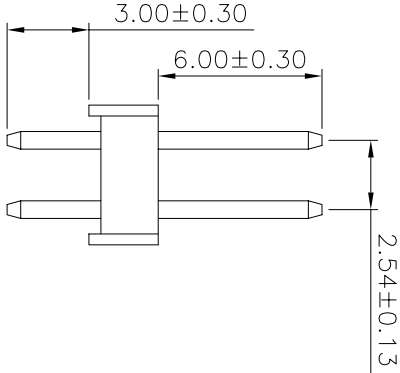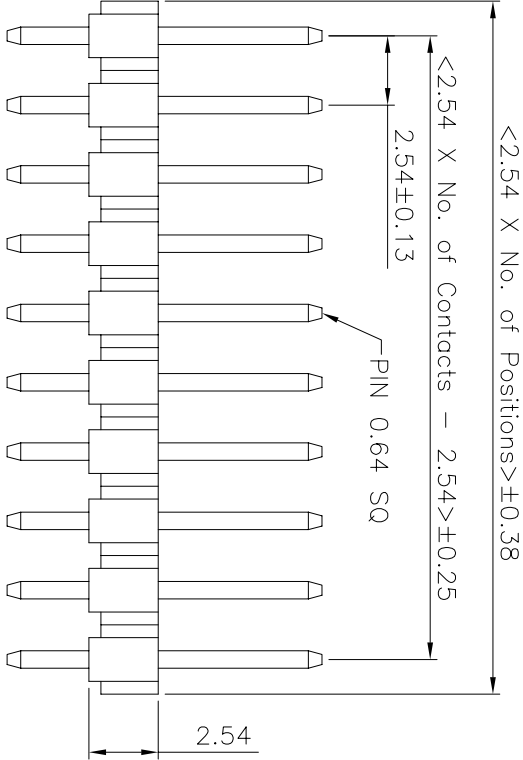

深圳市硕康达科技有限公司
ShenZhenShi Sokcomn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张 荣

DATE: 2007.09.15

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30
.X ± 3.0° .X ± 0.25
.XX ± 2.0° .XX ± 0.15
.XXX ± 1.0° .XXX ± 0.10

CHECKED:

DATE:

DWG. NO.

MHD201-A01

TITLE.