

REV.	LOOQS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张荣

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 PBT

All materials must be GP materials



Ordering Information

MHR101 - XX XX A 01 - X

No. of Pins per Row Contact Plating Options
01~40 01=Tin P=cap
 02=Gold Flash T=tape reel
 Duplex plating C=acetate tape
 05=Gold Flash /Tin PT=cap+tape reel
 ...

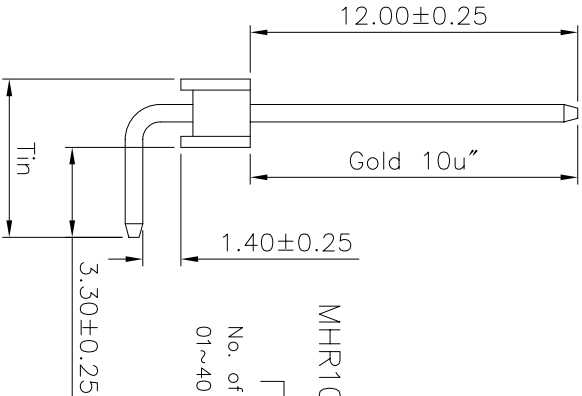

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

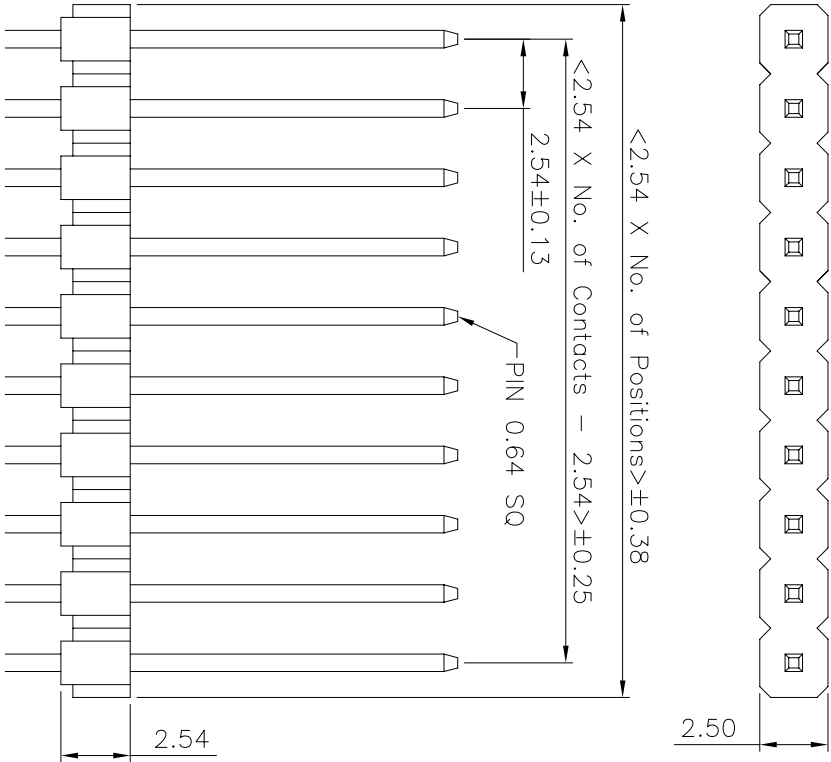

 深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.		GENERAL TOLERANCE			DESIGN: 张荣		DWG. NO.	TITLE.
					X.° ± 5.0°	X.	± 0.30	CHECKED:	DATE:		
					X.° ± 3.0°	X	± 0.25	AUDITED:	DATE:		
					.XX° ± 2.0°	.XX	± 0.15	APPROVED:	DATE:		
01	mm	5:1	1/1		.XXX ± 1.0°	.XXX	± 0.10			MHR101-A01	2.54 PIN HEADER SINGLE ROW R/A TYPE BASE 2.54H