




REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.08.07	李春桥

<2.54 X No. of Positions>±0.38

<2.54 X No. of Contacts – 2.54>±0.25

2.54±0.13


PIN 0.64 SQ

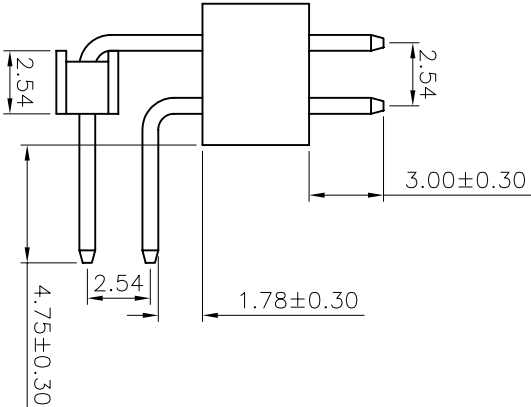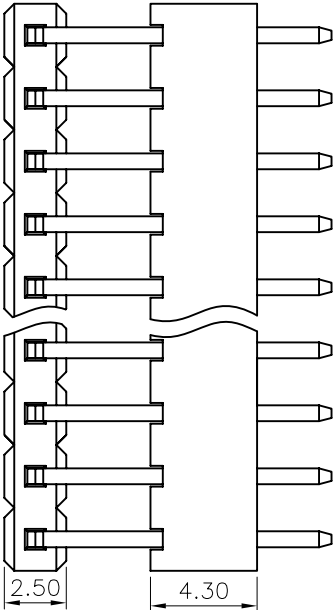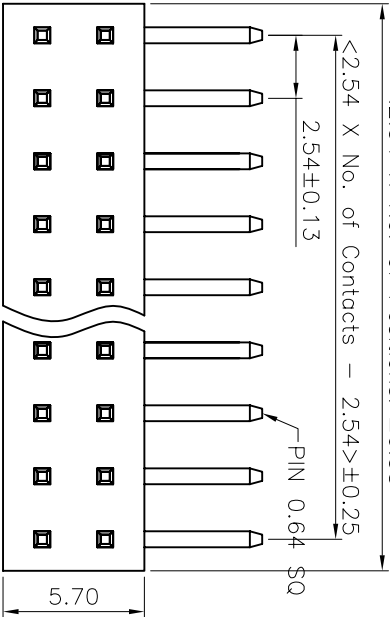

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials
Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be ROHS materials

**Recommended P.C.Board
Hole Layout**
(Tolerance: ±0.05)

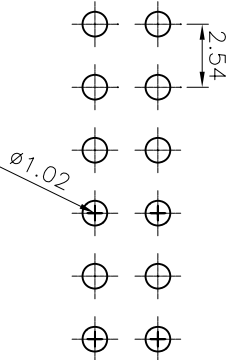

Ordering Information

MHR214 – XX XX A 01

No. of Pins per Row Contact Plating
01=TiN
02=Gold Flash
Duplex plating
...



深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 李春桥

DATE: 2013.08.07

DWG. NO.

MHR214-A01

TITLE.

2.54 PIN HEADER
DUAL ROW R/A TYPE
BASE 4.30H

X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

PART NO.

MHR214-XX XX A01

TITLE.

2.54 PIN HEADER
DUAL ROW R/A TYPE
BASE 4.30H

.XX ± 3.0° .X ± 0.25

AUDITED:

DATE:

PART NO.

MHR214-XX XX A01

TITLE.

2.54 PIN HEADER
DUAL ROW R/A TYPE
BASE 4.30H

.XX ± 2.0° .XX ± 0.15

APPROVED:

DATE:

PART NO.

MHR214-XX XX A01

TITLE.

2.54 PIN HEADER
DUAL ROW R/A TYPE
BASE 4.30H

.XXX ± 1.0° .XXX ± 0.10

DATE:

PART NO.

MHR214-XX XX A01

TITLE.

2.54 PIN HEADER
DUAL ROW R/A TYPE
BASE 4.30H