




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张 荣

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

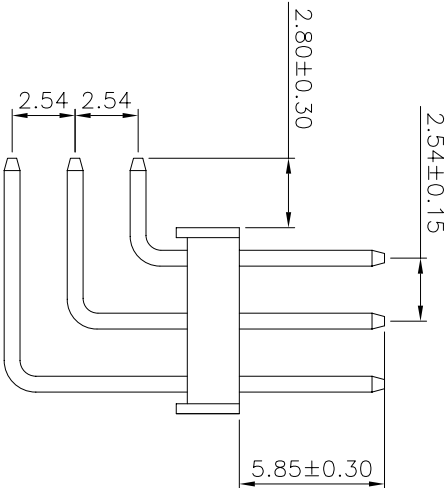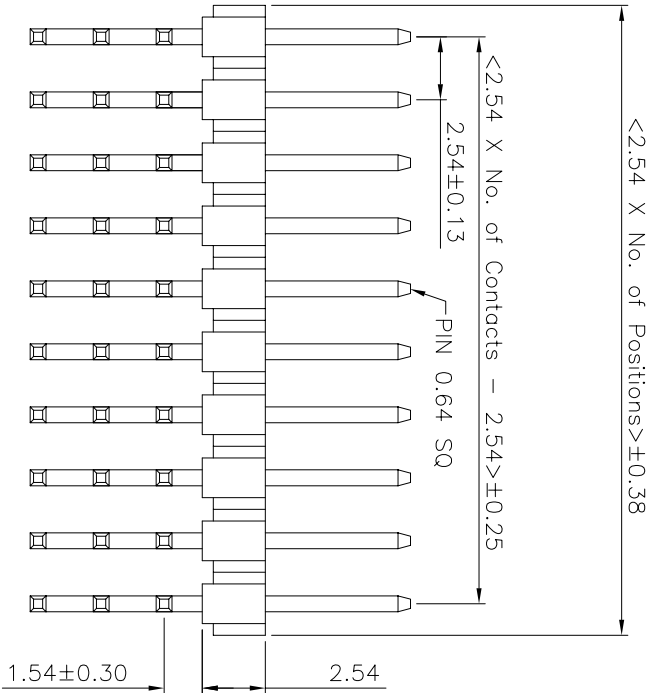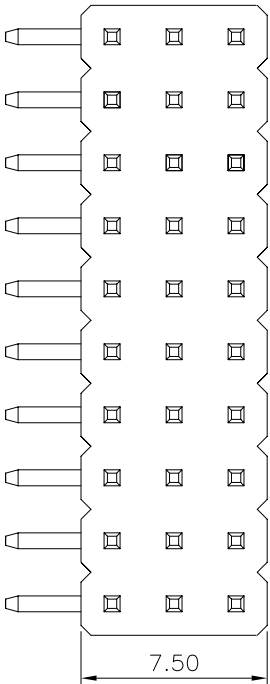

Recommended P.C.Board

Hole Layout
(Tolerance: ±0.05)



Ordering Information

MHR301 - XX XX A 02



No. of Pins per Row Contact Plating
01~40

01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张 荣

DATE: 2007.09.15

DWG. NO.

MHR301-A02

TITLE:

2.54 PIN HEADER

X. ± 5.0° X. ± 0.30

CHECKED:

DATE:

DWG. NO.

MHR301-A02

TITLE:

2.54 PIN HEADER

.XX ± 3.0° .X ± 0.25

AUDITED:

DATE:

PART NO.

MHR301-XX XX A02

DUAL ROW R/A TYPE

.XXX ± 2.0° .XX ± 0.15

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

DATE:

PART NO.

MHR301-XX XX A02

BASE 2.54H

.XXX ± 1.0° .XXX ± 0.10

APPROVED:

<