



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张 荣

Specifications



Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

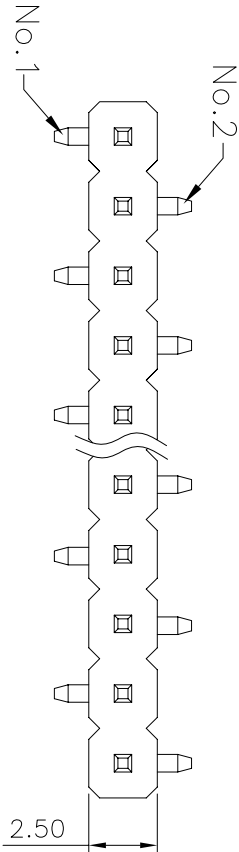

<2.54 X No. of Positions>±0.38

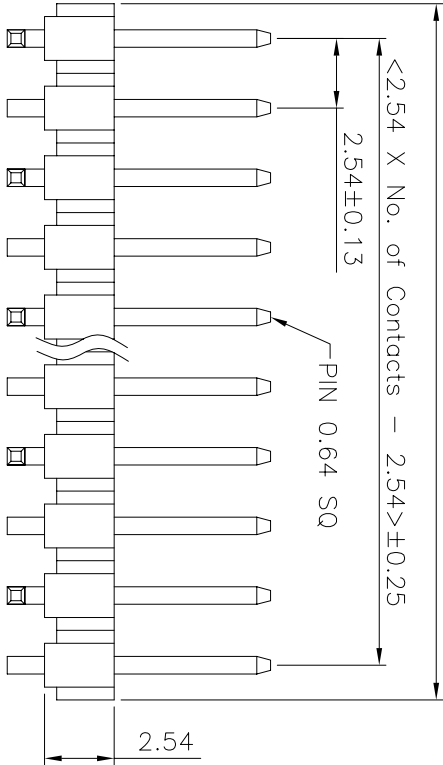

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

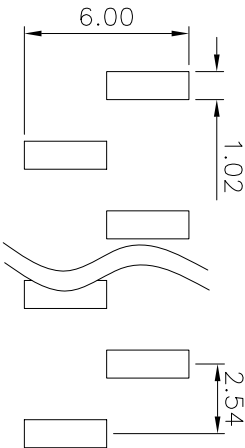

Ordering Information

MHR101 - XX XX A 02

Pin~~9~~40f Pins per Row Contact Plating

01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...



深圳市硕康达科技有限公司
ShenZhenShi Sokoon Technology Co., Ltd

GENERAL TOLERANCE

X.° ± 5.0° X. ± 0.30

.X° ± 3.0° .X ± 0.25

.XX° ± 2.0° .XX ± 0.15

.XXX° ± 1.0° .XXX ± 0.10

DESIGN: 张 荣

DATE: 2007.09.15

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

DATE:

DWG. NO.

MHS101-A02

TITLE.

2.54 PIN HEADER
SINGLE ROW SMT TYPE
BASE 2.54H

PART NO.

MHS101-XX XX A02