




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2013.06.20	李春桥

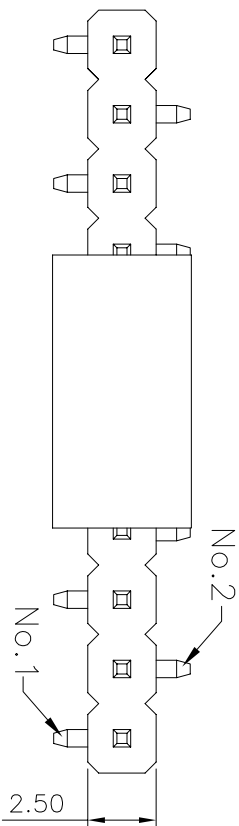

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C



Materials
Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be ROHS materials

Recommended P.C.Board
Hole Layout
(Tolerance: +/- 0.05)

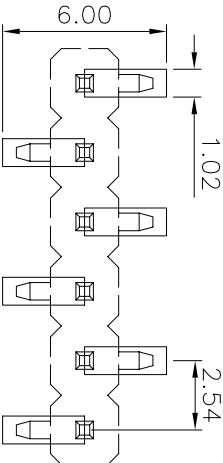

Ordering Information

MHS105 - XX XX A 01 - X
No. of Pins per Row Contact Plating Options
01~40 01=Tin P=cap
02=Gold Flash T=tape reel
Duplex plating PT=cap+reel
05=Gold Flash /Tin
...

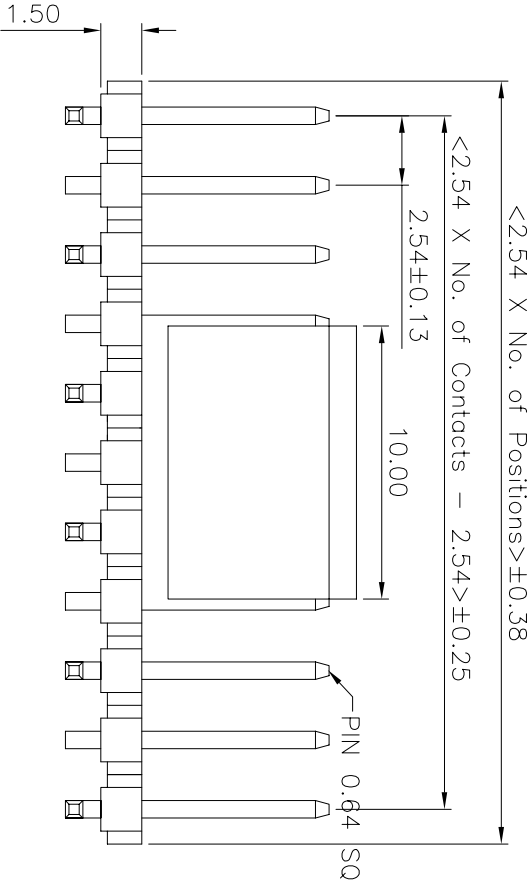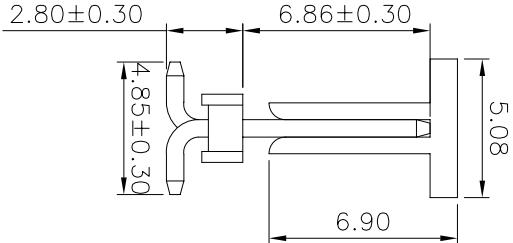

深圳市硕康达科技有限公司
Shenzhen Shi Sokoon Technology Co., Ltd

GENERAL TOLERANCE				DESIGN: 李春桥		DATE: 2013.06.20		DWG. NO. MHS105-A01		TITLE. 2.54 PIN HEADER SINGLE ROW SMT TYPE BASE 1.50H	
X.° ± 5.0°	X.	± 0.30	CHECKED:	DATE:							
.X° ± 3.0°	.X	± 0.25	AUDITED:	DATE:							
.XX ± 2.0°	.XX	± 0.15	APPROVED:	DATE:							
.XXX ± 1.0°	.XXX	± 0.10									

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	