

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张 荣

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass






Insulation Material: Polyester, UL 94V-0

Nylon 9T

All materials must be GP materials

Recommended P.C.Board

Hole Layout

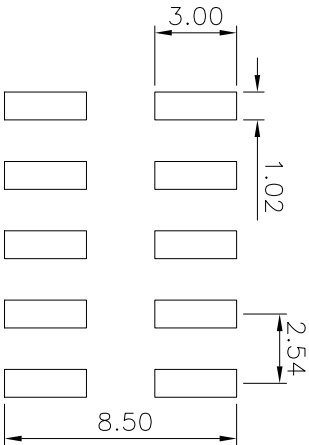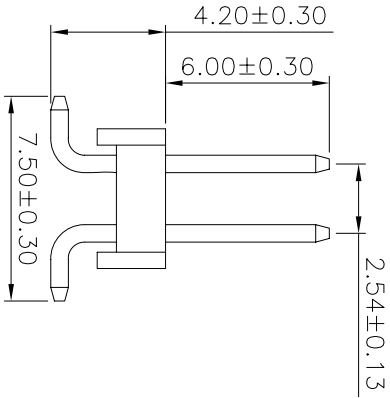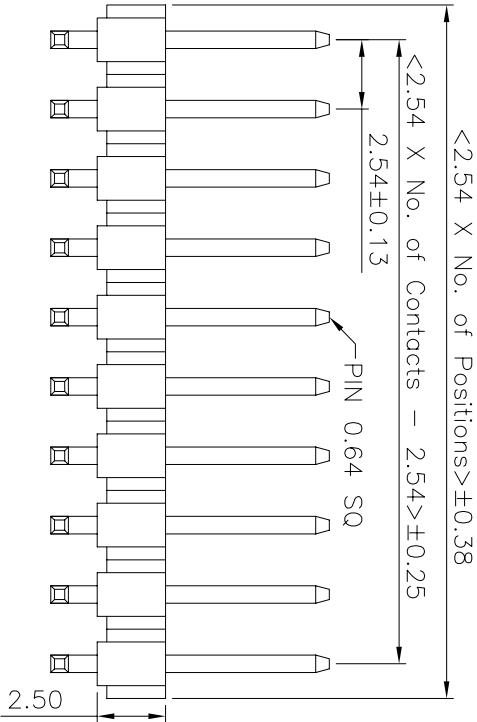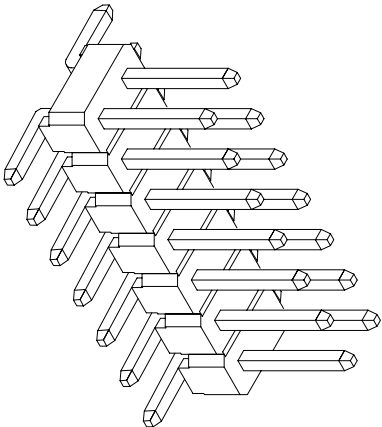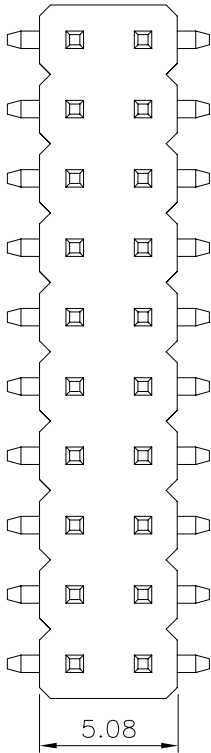

Ordering Information

MHS201 - XX XX A 01

No. of Pins per Row Contact Plating
01~40 01=TiN
02=Gold Flash

Duplex plating
...



深圳市硕康达科技有限公司
Shenzhen Shi Rong Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 张 荣

DATE: 2007.09.15

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

X. $\pm$ 5.0°

X. $\pm$ 0.30

CHECKED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

X. $\pm$ 3.0°

X. $\pm$ 0.25

CHECKED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XX $\pm$ 2.0°

.XX $\pm$ 0.15

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$ 0.10

AUDITED:

DATE:

DWG. NO.

MHS201-A01

TITLE:

2.54 PIN HEADER

.XXX $\pm$ 1.0°

.XXX $\pm$