

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.11.17	尹 晖

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0

Nylon 6T

All materials must be GP materials

Recommended P.C.Board
Hole Layout

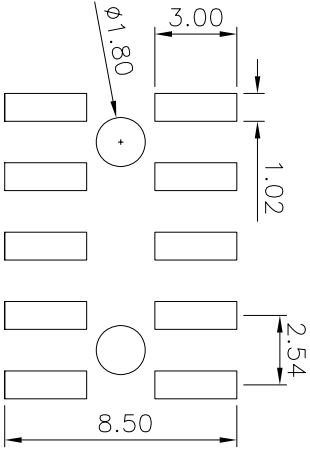


Ordering Information

MHS220 - XX XX A 01-X

No. of Pins per Row Contact Plating Options
01~40 01=Tin P=cup
02=Gold Flash T=tape reel
Duplex plating PT=cup+reel

...



深圳市硕康达科技有限公司
ShenzhenShi Sokconn Technology Co., Ltd

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	

GENERAL TOLERANCE			DESIGN:	尹 晖	DATE:	2011.11.17
X° ± 5.0°	X.	± 0.30	CHECKED:		DATE:	
.X° ± 3.0°	X.	± 0.25	AUDITED:		DATE:	
.XX° ± 2.0°	.XX	± 0.15	APPROVED:		DATE:	
.XXX° ± 1.0°	.XXX	± 0.10				

DWG. NO.	TITLE.
MHS220-A01-X	2.54 PIN HEADER
PART NO.	DUAL ROW SMT TYPE
MHS220-XX XX A01-X	BASE 2.54H

