

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2008.06.07	尹 晖

Specifications





Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 1000V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0
Nylon 6T

All materials must be GP materials

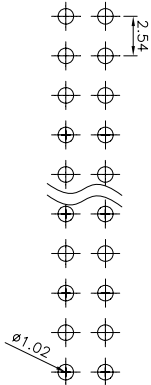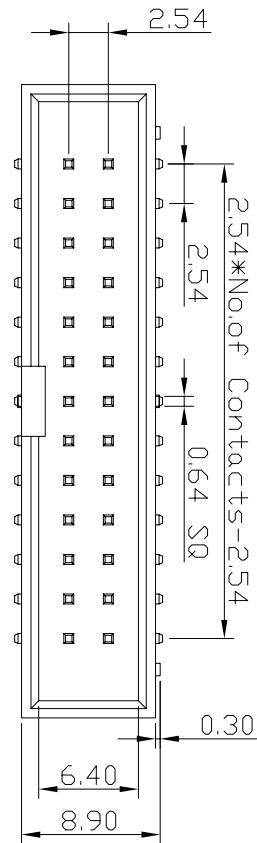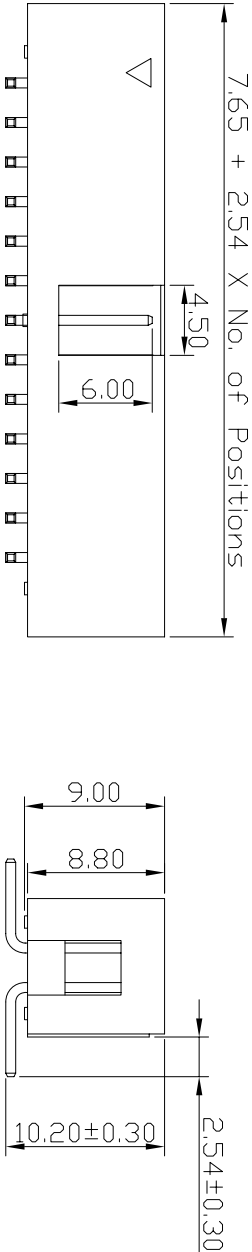

Recommended P.C.Board
Hole Layout

Ordering Information

MHSBOX - XX XX A 01

No. of Pins
06~64

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

 深圳市硕康达科技有限公司 ShenZhenShi Sokcom Technology Co., Ltd					GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2007.06.07	DWG. NO.	TITLE: 2.54 PIN BOX DUAL ROWS SMT TYPE BASE 9.0H
					X.° ± 5.0°	X. ± 0.30	CHECKED:	DATE:	MHSBOX-A01	
					X.° ± 3.0°	X. ± 0.25				
					.XX° ± 2.0°	.XX ± 0.15	AUDITED:	DATE:	PART NO.	
					.XXX ± 1.0°	.XXX ± 0.10	APPROVED:	DATE:	MHSBOX-XX XX A01	
REV.	01	UNIT. mm	SCALE. 1:1	PAGE. 1/1						