





REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.08.27	尹 晖

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass/Gold
Insulation Material: Polyester, UL 94V-0
Nylon 6T
All materials must be GP materials

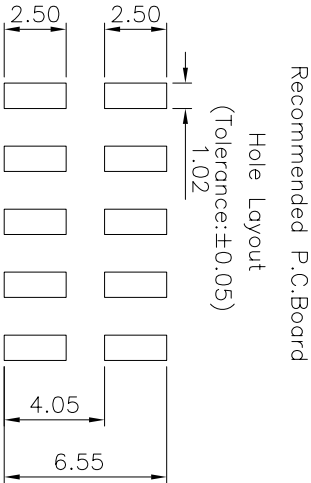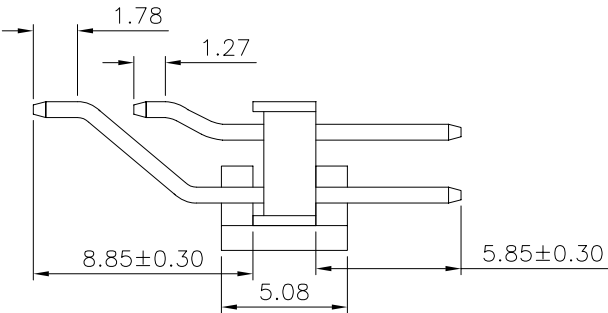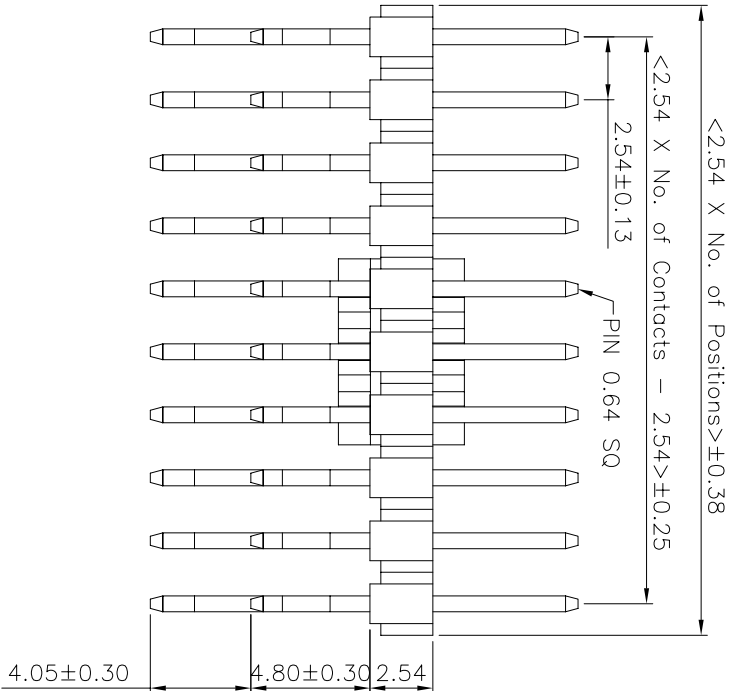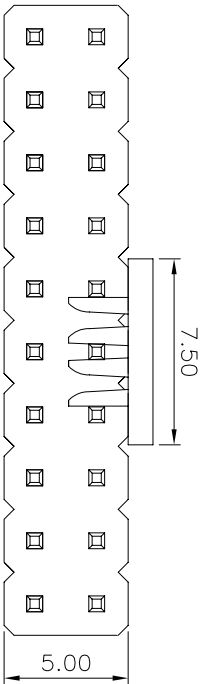

Ordering Information

MHW205 - XX XX A 01-X

No. of Pins per Row Contact Plating Options
01~40 01=Tin P=cup
02=Gold Flash T=tape reel
Duplex plating PT=cup+tape reel
05=Gold Flash /Tin ...



深圳市硕康达科技有限公司
ShenzhenShi Sokom Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2011.08.27

DWG. NO. MHW205-A01

TITLE. 2.54 PIN HEADER

X. $\pm 5.0^\circ$ X. ± 0.30

CHECKED:

DATE:

PART NO.

DUAL ROW SMT TYPE

.XX $\pm 3.0^\circ$.X ± 0.25

AUDITED:

DATE:

MHW205-XX XX A01

BASE 2.54H

.XX $\pm 2.0^\circ$.XX ± 0.15

APPROVED:

DATE:

.XXX $\pm 1.0^\circ$.XXX ± 0.10