REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.07.25	尹 晖

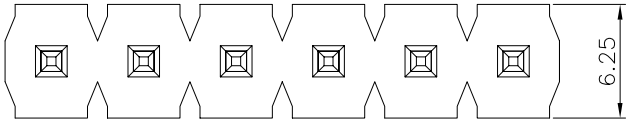

Specifications
Current Rating: 7.9Amp
Insulation Resistance: 5000MΩ Min.
Dielectric Withstanding: 1500V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:−55°C to +125°C
Materials
Contact Material: Brass
Insulation Material:Polyester, UL 94V−0
LCP
All materials must be GP materials

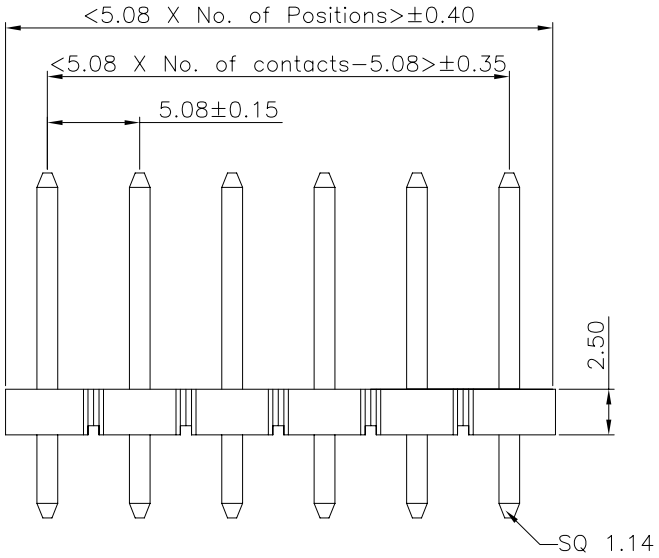

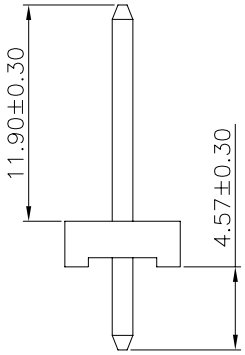

Recommended P.C.Board Layout
(Tolerance:±0.05)

Ordering Information

MMD101 − XX XX A 01

No. of Pins per Row
02~20

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash/Tin
...

深圳市硕康达科技有限公司
ShenZhenShi Sokconn Technology Co.,Ltd

GENERAL TOLERANCE	
X.° ± 5.0°	X. ± 0.30
.X° ± 3.0°	.X ± 0.25
.XX° ± 2.0°	.XX ± 0.15
.XXX° ± 1.0°	.XXX ± 0.10

DESIGN: 尹 晖	DATE: 2012.07.25	DWG. NO. MMD101−A01	TITLE. 2.54 PIN HEADER BASE 2.54
CHECKED:	DATE:		
AUDITED:	DATE:	PART NO. MMD101−XX XX A01	
APPROVED:	DATE:		

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1