

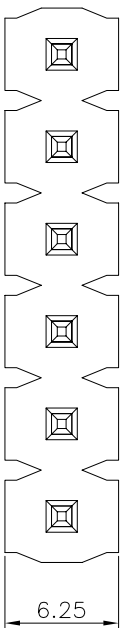


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.07.25	尹 晖

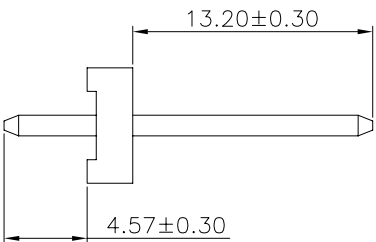

Specifications

Current Rating: 7.9Amp
Insulation Resistance: 5000M Ω Min.
Dielectric Withstanding: 1500V AC/DC
Contact Resistance: 20m Ω Max.
Operating Temperature: -55°C to +125°C
Materials
Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
LCP
All materials must be GP materials

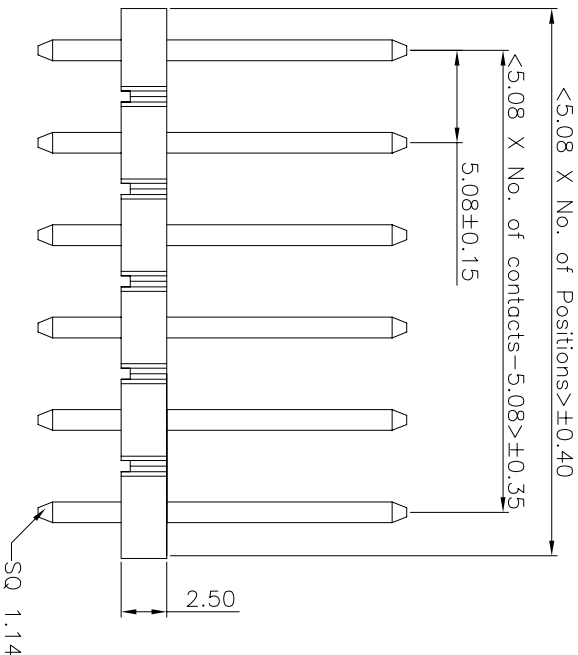

Recommended P.C.Board Layout
(Tolerance: ±0.05)

Ordering Information

MMD101 - XX XX A 02
No. of Pins per Row
02~20
Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash/Tin
...

 深圳市硕康达科技有限公司 ShenZhenShi Sokcoonn Technology Co., Ltd				GENERAL TOLERANCE		DESIGN: 尹 晖	DATE: 2012.07.25	DWG. NO. MMD101-A02	TITLE: 2.54 PIN HEADER BASE 2.54
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1		X* ± 5.0°	X. ± 0.30	CHECKED:	DATE:	PART NO. MMD101-XX XX A02
					X* ± 3.0°	.X ± 0.25	AUDITED:	DATE:	
					.XX* ± 2.0°	.XX ± 0.15	APPROVED:	DATE:	
					.XXX* ± 1.0°	.XXX ± 0.10			