


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2012.07.25	尹 晖

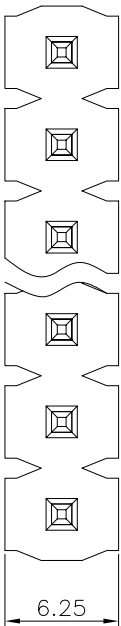

Specifications

Current Rating: 7.9Amp

Insulation Resistance: 5000M Ω Min.

Dielectric Withstanding: 1500V AC/DC

Contact Resistance: 20m Ω Max.

Operating Temperature: -55°C to +125°C



Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0

LCP

All materials must be GP materials

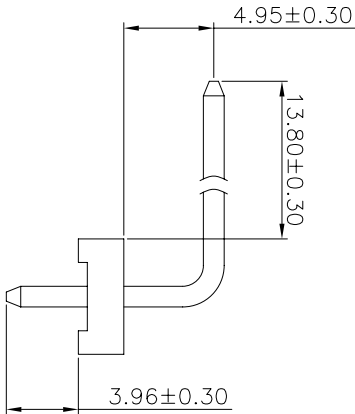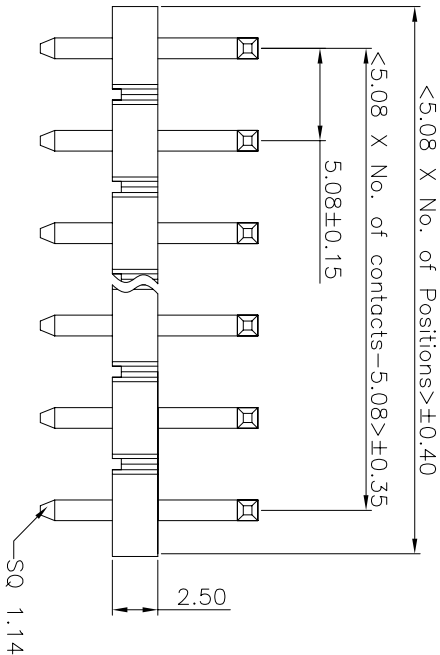

Recommended P.C.Board Layout
(Tolerance: ±0.05)

Ordering Information

MMR101 - XX XX A 01

No. of Pins per Row
02~20

Contact Plating

01=Tin

02=Gold Flash

Duplex plating

05=Gold Flash/Tin



深圳市硕康达科技有限公司
ShenzhenShi Sokcomm Technology Co., Ltd

GENERAL TOLERANCE

DESIGN: 尹 晖

DATE: 2012.07.25

DWG. NO.

MMR101-A01

TITLE:

2.54 PIN HEADER

REV.

01

UNIT.

mm

SCALE.

1:1

PAGE.

1/1



.XXX ± 1.0°

.XXX ± 0.10

AUDITED:

DATE:

MMR101-XX XX A01

BASE 2.54